Datasheet
Main switch
Art. No. MKAAGH12-W

Intratec Warenhandels GmbH
Gruetzmuehlenweg 46
22339 Hamburg
Germany
FON: +49 40 538092 888
FAX: +49 40 538092 930
MAIL: info@intratec-hh.de
WEB: www.intratec-shop.de

Electrical specifications

Service voltage: 400V AC
Material housing: acrylonitrile butadiene styrene (ABS)
Colour: White RAL 9003
Material door: Acrylonitrile butadiene styrene (ABS)
Colour: Transparent or white
For installation of devices up to max. 63A
With built-in DIN top-hat rail for all standard circuit breakers / residual current circuit breakers according to DIN 43880
Finger-safe N/PE terminal strip
Fixing material
Installation instructions
Protection class: II / Protection rating: IP40
Door hinge: right or left
Pre-stamping for cable glands: none
Glow wire test: 650°C
Temperature resistance: -25°C to +60°C
RoHS conform, CE
Manufactured according to DIN IEC60670 / IEC 60228
Optional lock with key

Dimensions:
A: 310 mm
B: 251 mm
C: 96 mm
D: 219 mm
E: 96 mm

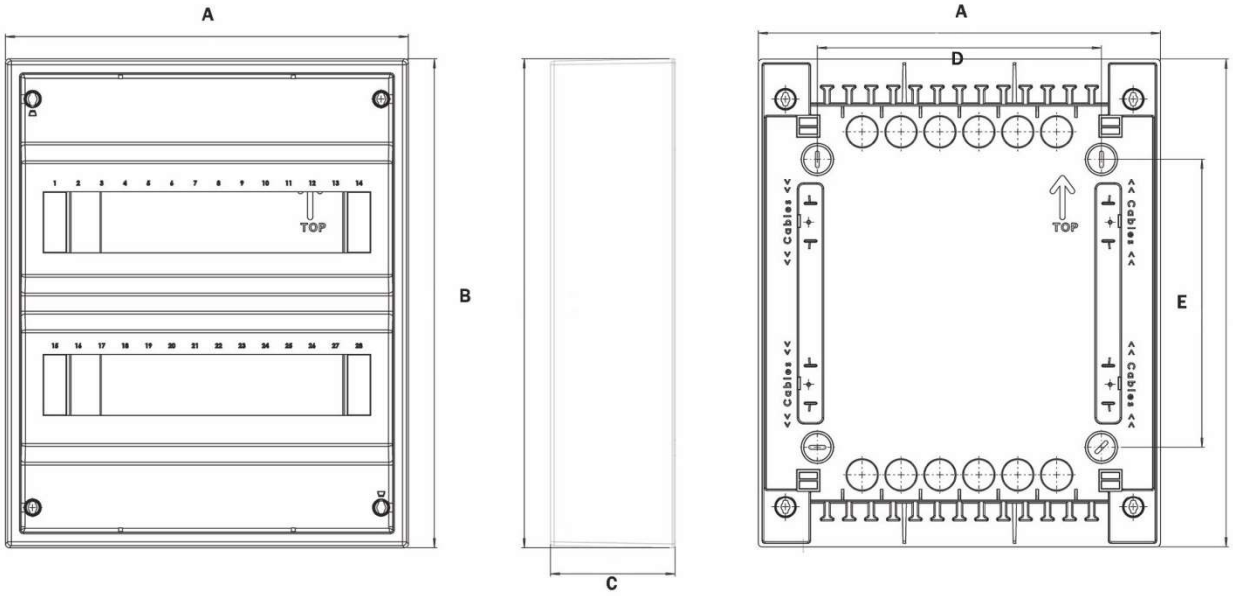

Intratec Warenhandels GmbH
Grützmühlenweg 46 · 22339 Hamburg · Phone +49 (0) 40 / 53 80 92 – 888 · Fax: +49 (0) 40 53 80 92 – 930