



**INTRATEC**  
100% SHOPPING

**Datasheet  
Main switch  
Art. No. JSNLBL05**

**Intratec Warenhandels GmbH**

Gruetzmuehlenweg 46  
22339 Hamburg  
Germany

FON: +49 40 538092 888

FAX: +49 40 538092 930

MAIL: [info@intratec-hh.de](mailto:info@intratec-hh.de)

WEB: [www.intratec-shop.de](http://www.intratec-shop.de)



## Electrical Specifications

Material housing: polycarbonate, impact-resistant, unbreakable

Colour: RAL 9003 white

Material cover: polycarbonate, opal, impact resistant, shatterproof

Pictogram: PVC film, self-adhesive

Mounting type: wall and ceiling mounting

Protection class: IP54

Protection class: II

Light source: LED max. 1,2 W

Connected load: DS: max. 9VA

Connected load: BL: max. 4,4 VA

Battery: LiFePO4 3,2 V / 1,6 Ah

Emergency light: 3h and 8h (adjustable via jumper provided)

120 lm (mains operation) / 120 lm (emergency operation) 3 hours

120 lm (mains operation) / 50 lm (emergency operation) 8 hours

AUTOTEST

incl. pictogram set (emergency exit RW left, RW right, RW straight ahead)

EKW: 32 m

**Dimensions:**


A: 330 mm

B: 202 mm

C: 94 mm

D: 83 mm

Deckenmontage

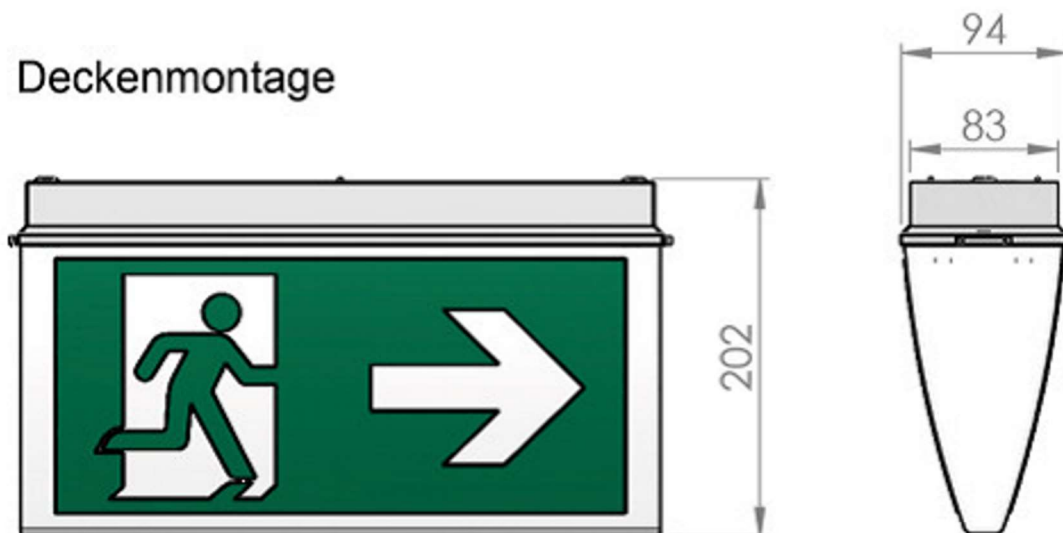

Bohrplan

Kabeleinführungen

